


Hummingbird® technology

A process to convert ethanol to ethylene through dehydration

ETHANOL DEHYDRATION OPERATING REGIMES

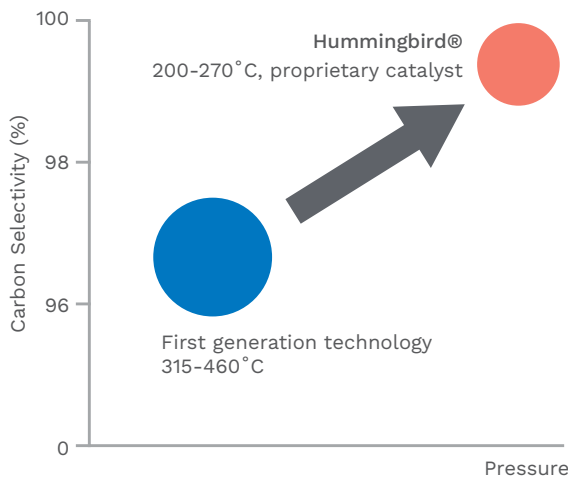

Hummingbird is a second generation, low-cost process for dehydrating ethanol to ethylene. The technology uses a proprietary heteropolyacid (HPA) supported catalyst, operating at a lower temperature, higher pressure, and higher selectivity than first generation processes.

Low capital intensity process

Hummingbird is ideal for modest scale ethylene capacity additions or when production is remote from world-scale ethylene infrastructure.

Producing niche derivatives

Hummingbird gives ethylene derivative producers an option to produce 'niche' renewable derivatives from sustainable bioethanol sources.

Diversifying ethanol production

Hummingbird can be an important step into alternative chemical pathways or a building block for a bio-refinery.

Hummingbird process advantages

Bioethanol feedstock flexibility


As commercial bioethanol can contain a variety of trace components which may affect ethanol dehydration process performance, Hummingbird technology includes a "toolkit" for the clean-up of bioethanol feedstocks. This was developed from the analyses of over 50 bioethanols from various sources, providing enhanced feedstock flexibility.

Ultra selective reaction

Using an HPA catalyst, Hummingbird produces polymer grade ethylene with over 99% selectivity.

Simplified product separation

Hummingbird operating conditions reduce capital and operating costs, and is readily integrated into existing petrochemical utility systems. Mild process temperatures do not require dilution water to prevent catalyst coking, ultra-selectivity removes the need for a C2 Splitter or CO/CO₂ removal in product separation, and product compression power is reduced.

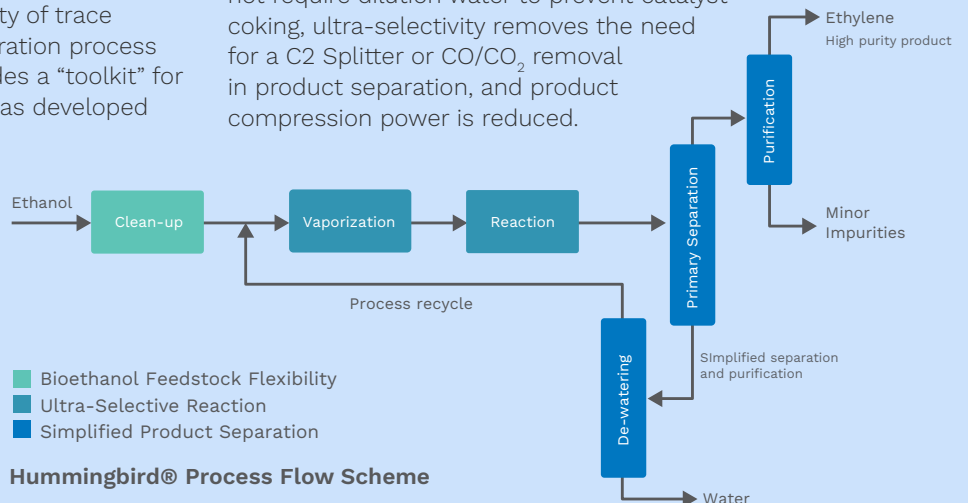

Hummingbird® Process Flow Scheme

- Bioethanol Feedstock Flexibility
- Ultra-Selective Reaction
- Simplified Product Separation

Proven pilot operation

A fully recycling facility with purification columns, similar to a full commercial plant, has proven the ultra-selective operation of Hummingbird technology with over 24,000 hours of operation on commercial bioethanol feedstocks.

Successive commissioning, development, and demonstration operating phases have developed a thorough understanding of the process operation.

Operating at multi-kg per hour ethylene production rate, and incorporating bioethanol clean-up facilities, the pilot plant has produced bioethylene product to specification.

Proprietary HPA catalyst development

Operating guidelines, developed from knowledge of the pilot plant operation, ensure that catalyst operation is maintained during start-up, shutdown, and steady state operation with a catalyst life in excess of two years.

Our proprietary HPA catalyst formulation has been manufactured at commercial scale. Pilot Plant operations using the commercially produced catalyst have performed in accordance with design selectivity and catalyst life expectations.

Polymer grade bioethylene

The ethylene produced from Hummingbird technology is indistinguishable from that produced from Technip Energies' conventional ethylene technologies; although may be labelled as bioethylene if produced from bioethanol.

Successful downstream polymerization tests have been performed on pilot plant products using Ziegler Natta and Metallocene catalysts.

Hummingbird process stoichiometry and process economics

As over 90% of the variable cost of ethylene production from ethanol dehydration is the cost of the ethanol feed, selectivity is key to a commercially competitive process. Hummingbird shows a clear advantage over first generation processes, resulting in reduced ethanol consumption.

The combined benefits of lower ethanol feed consumption, greater integration with existing plant utilities, and simplification of the product separation, gives real world benefits in terms of reduced capital and operational expenditures compared to first generation processes.

Ethanol dehydration process mass flows

Component	Stoichiometry (mass flow)	First Generation (mass flow)	Hummingbird (mass flow)
Ethanol	1.64	1.70	1.66
Ethylene	1.00	1.00	1.00
Water	0.64	0.70	0.66

“
...a second generation, low-cost process for dehydrating ethanol to ethylene
”



Carlos Rolandelli
+44 1908 20 3400
carlos.rolandelli@technipenergies.com

Erik Moy
+1 617 748 7262
erik.moy@technipenergies.com

www.technipenergies.com