## Large Scale Vortex Burner

Our high-quality, low-nox combustion solution





### Technip Energies' burner technology Developing combustion solutions for tomorrow

Clients and regulators today are placing greater expectations and demands on burners than at any time in the past. While plant owners want larger capacity, greater reliability and lower costs, regulations are driving demand for higher efficiency and tighter emission limits on pollutants like carbon monoxide (CO) and nitrogen oxide (NOx).

Features	Benefits
Unique nozzle to rapidly dilute fuel	Flamele
	Low NO:
Very flexible fluidic flame stabilizer	Ultra-le
Robust design	Reliable
Multi-fuel flexibility	Burner o
Shielded fuel lances	No cokir
	Clean ti
Adjustable and uniform flame heat	Heat rel
release profile	Lower ra
	High fire
Manufactured by Technip Energies	Quality
	Latest d

The burner also can be used to avoid higher capital intensive DeNOx systems based on selective catalytic reduction (SCR) in certain applications and regions.

In response to changing market conditions, Technip Energies's experts in fired heaters are developing innovative solutions, including our Large Scale Vortex (LSV®) burner technology.

The LSV was developed by Air Products, a company with substantial experience in fired heater operation. For more than 15 years, the burner has been in service in its steam reformer installations.

#### s

ess combustion

X

ean and cool primary flame

è

can be used for a wide range of processes

ing or plugging

ips

lease matching process requirements

radiant tube wall temperature

ebox efficiency

control

developments in burner design applied

# Why choose the LSV burner?



**The burner is a cost-effective,** Field results confirm low-NOx combustion solution representing Technip Energies' successful track record in design. It can be applied to different process heating applications and combustion air supply modes (natural draft, induced draft or forced draft). The combustion air may be at ambient temperature or preheated. The burner also is suitable for a wide range of fuel gas compositions and firing configurations. It can be placed on the roof (top firing) or on the floor (bottom firing) of a firebox.

our best-in-class burner technology:

- Ultra-low NOx emissions
- Uniform flame heat release profile • Compact flame for longer
- lasting radiant tubes • Trouble-free plant operations
- Selective catalytic reduction avoidance in certain
- applications • Smooth burner light-off

Air

burners with LSV technology can result in greater capacity and run length. The high quality of the LSV burner arises from its: • Simple, single burner block

The burners also can be applied to retrofit projects. Replacement of existing

- design
- High-grade, standard tip materials
- Robust design
- Ability to avoid overheating and tip-fouling
- Versatility for revamp projects Supply chain management by Technip Energies



4 • Large Scale Vortex burner

### **Research and** development

Technip Energies continuously researches the performance of the LSV burner in a radiant firebox environment such as an ethylene furnace or a steam reformer. We apply our proprietary CFD-NOx simulator (computational fluid dynamics study of NOx emissions) to correctly predict flame shape, flue gas temperature and flow profiles and radiant coil heat flux profiles.

The Clean Energy Lab at Air Products' U.S. headquarters continues to fine-tune the burner to achieve even lower emissions.



Test furnace, Air Products

### **Customer** satisfaction


LSV technology has been applied successfully over the past 15 years in cracking furnace and hydrogen reformer installations. The burners have been installed in new and revamp projects on both induced draft and balanced draft furnaces. They operate efficiently and reliably with limited maintenance. The burners consistently earn high marks from customers around the world.




Bottom-mounted LSV burner in operation







Top-mounted LSV burner in operation

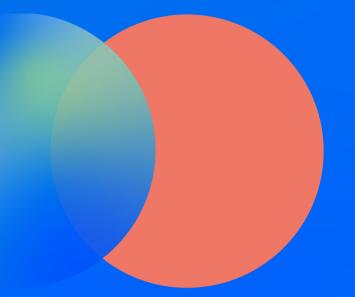

Dante Pastore Director, Ethylene Market +39 066 598 5876 Dante.pastore@ten.com

David Vergé +31 79 3293 870 contact-hydrogen@ten.com david.verge@ten.com

www.ten.com